



6X Thermal Pro

Precision and Clarity Redefined

With four 3.2MP radiometric multispectral imagers, a 20MP RGB imager, and a FLIR Boson 640 radiometric thermal imager, the 6X Thermal Pro delivers four times the resolution of the 6X Thermal, ensuring unparalleled data accuracy. Its ultra-lightweight, gimballed design, high capture rate, and 512GB internal SSD storage maximize productivity and efficiency. Ideal for advanced analytics, it seamlessly integrates data into common software platforms, empowering agronomists, researchers, and industry professionals to make informed decisions based on precise and accurate data. The Sentera 6X Thermal Pro sets a new standard in multi-sensing data capture.



Scan QR code to buy this product


Key Benefits

- **Maximize Productivity:** Light weight, fast capture rate, synchronized image capture, and gimbal allow for faster & longer flights without sacrificing data quality
- **Ease-of-use:** Plug and play integration, rig processing support, time of capture geo-tagging, and large internal storage streamline your workflow
- **Easy Integration:** 6X Thermal Pro is already compatible with many popular UAS platforms and is easy to integrate with other systems using the common interfaces and I/O options
- **Accuracy:** Paired with an incident light sensor, calibrated reflectance panel, and gimbal, 6X Thermal Pro is ready to produce radiometrically accurate data out of the box

Key Features

- Four 3.2MP global shutter multispectral imagers, one 20MP RGB imager, and one 640 radiometric FLIR Boson imager
- Synchronized image capture for all channels; supports rig processing
- Full metadata tagging with geolocation and image characteristics
- Open and standardized data formats
- Incident light sensor and calibrated reflectance panel included
- NDAA Compliant

The spectral resolution of the 6X Multispectral + RGB + Thermal Sensor

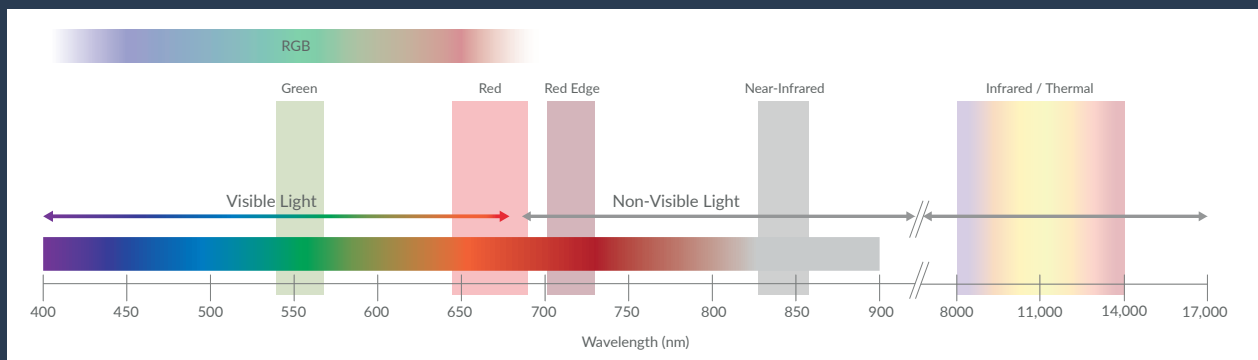

SPECIFICATIONS**

6X Thermal Pro



| | |
|---|--|
| Resolution | 2048px by 1536px (Multispectral) 5184px by 3888px (RGB) 640 x 512 (Thermal) |
| Shutter Type | Global (Multispectral) Electronic Rolling Shutter (RGB) Shutterless (Thermal) |
| Sensor | Sony IMX147 (RGB) Sony IMX265 (Multispectral) FLIR Boson 640R (Thermal) |
| Power Input | 10.5 - 26V |
| Power Consumption | 15W Typical, 18W Max |
| Capture Rate | 5 FPS (0.2s interval) |
| Storage | 512 GB Internal SSD |
| Filter/Sensitivity (custom filtering is available) | Green: 550nm CWL x 20nm Red: 670nm CWL x 30nm Red Edge: 715nm CWL x 10nm NIR: 840nm CWL x 20nm RGB: IR cut 650nm Thermal Infrared: Radiometric: 8um to 14um |
| Interfaces | USB-C 3.0, Gigabit Ethernet, PPS, Serial, Discrete I/O |
| Supported Protocols | DJI, MAVlink V1 & V2, Custom |
| Image Format | 8-bit JPEG (RGB), 12-bit TIFF (MSP), 16-bit TIFF (Thermal) |
| Weight (Sensor only) | 290g |
| Weight (With gimbal) | Skyport: 505g Smart Dovetail: 525g Gremsy Hyper Quick: 500g ILS adds 58g to total |
| GSD @200ft (60m) | 1.0in / 2.6cm (MSP), 0.4in / 1.0cm (RGB), 3.4in / 8.75cm (LWIR) |
| Field of View | 47° HFOV (MSP and RGB) 50° HFOV (Thermal) |
| Dimensions (Sensor Only) | 79.5mm x 66mm x 67.5mm |
| Dimensions (With gimbal) | 111.8mm x 126.2mm x 106.4mm |



Scan QR code to
browse support
documentation

COMPATIBILITY**

Fully Integrated:

| | |
|-----------------|------------------------|
| DJI | M350, M300, M210, M200 |
| Inspired Flight | IF800 Tomcat, IF1200 |
| Freefly | Astro |

Custom Integration Options:

| | |
|---------------------------|----------------|
| Gimbal Interfaces: | |
| Freefly | Smart Dovetail |
| Gremsy | Hyper Quick |

| | |
|-------------------------------|-------------------------------------|
| Non-Gimbal Interfaces: | |
| JST GH | Serial, Power In, Ethernet, PPS PWM |
| USB-C | USB |
| 2-56 Threaded Mounting Holes | Mounting 6 Locations |

Key Use Cases

- Evaporation analysis
- Water stress prediction and monitoring
- Mapping: Multispectral, RGB, DSM/Elevation, Thermal
- Residue cover, carbon monitoring, and conservation practice verification
- Crop health, damage, disease detection, nutrient status, and stress
- Forest fire detection, active flame identification
- Soil and vegetation moisture levels

**Specifications are subject to change without notice

**With appropriate post-processing